




FML ske Manufacturing Co., Ltd

8 mm x 22 mm x 7 mm NTN 608ZZ deep groove ball bearings

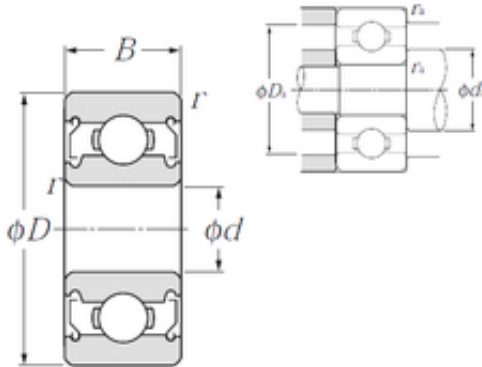

Bearing No. 608ZZ

608ZZ Bearing 2D drawings and 3D CAD models

Size	8x22x7 mm
Bore Diameter	8 mm
Outer Diameter	22 mm
Width	7 mm
d	8 mm
D	22 mm
B	7 mm
C	7 mm
r min.	0,3 mm
da min.	10 mm
da max	12,2 mm
Da max.	20 mm
ra max.	0,3 mm
Weight	13 Kg
Basic dynamic load rating (C)	3,35 kN
Basic static load rating (C0)	1,4 kN
(Grease) Lubrication Speed	32 000 r/min
Category	Single Row Ball Bearings
Inventory	280.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.012
EAN	4547359552683
Product Group	B00308
Enclosure	2 Metal Shields



FML ske Manufacturing Co., Ltd

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	8MM Bore; 22MM Outside Diameter; 7MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	608ZZ/3E
Weight / LBS	0.026
Bore	0.315 Inch 8 Millimeter
Outside Diameter	0.866 Inch 22 Millimeter
Outer Race Width	0.276 Inch 7 Millimeter
bore diameter:	8 mm
static load capacity:	1400 N
outside diameter:	22 mm
precision rating:	ISO Class 0
overall width:	7 mm
finish/coating:	Uncoated
bore type:	Round



FML ske Manufacturing Co., Ltd

bearing material:	High Carbon Chrome Steel
closure type:	Double Shielded
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	7 mm
snap ring included:	Without Snap Ring
outer ring width:	7 mm
internal clearance:	CN
maximum rpm (grease):	32000 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	0.3 mm
dynamic load capacity:	3350 N
manufacturer product page:	Click here